


HP b2600 Workstation

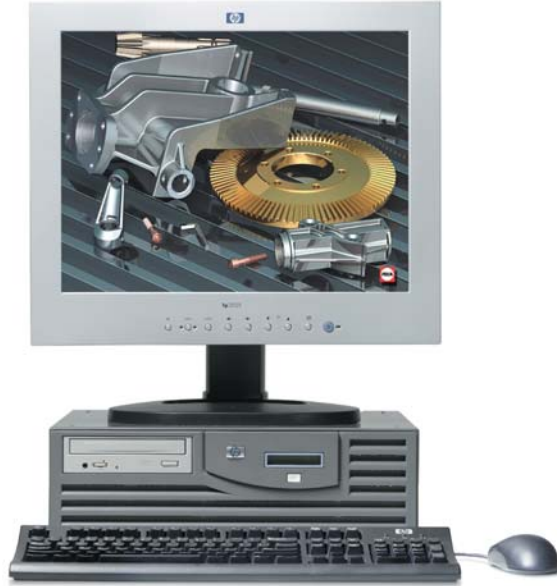

The HP b2600 Workstation delivers performance, stability and value to OEMs, telecommunication customers and low-end designers who need a high performance long-term solution with a robust feature set. With a 500 MHz PA-8600 processor, up to 4 GB memory, and full featured HP fx graphics, the HP b2600 Workstation has the capacity to reduce cycle times and easily cope with low to mid-range electronic design and mechanical design tasks such as circuit design and basic modeling. The desktop form factor of the HP b2600 Workstation is an attractive. Structured and designed to deliver to the customer an easy ordering and installation experience, the HP b2600 Workstation gives you the power to invent with a system delivering the ideal combination of price performance and reliability.

Features

- **PA-8600 RISC processor:** running at 500 MHz puts more compute power behind your applications.
- **1.5 MB on-chip cache:** enhances system performance with greater application speed and throughput minimizes system latency.
- **Maximum main memory up to 4 GB SDRAM:** delivers higher application performance with less disk

access and supports interactive work with complex 2D and entry 3D models.

- **Full range of graphics cards:** HP offers a complete line from professional 2D to high-end 3D, providing the power you need for mechanical design, analysis, and accurate 2D imagery.
- **Rack-mountable:** saves space while offering relief to users needing to maximize real estate and supports up to 13 systems in one 2 meter rack.
- **Binary compatibility with future PA-RISC processors :** protects your investment in applications, data and systems and ensures a smooth transition to HP's next generation high-performance systems.
- **Full-featured base configuration:** provides for a long, low maintenance life in embedded systems, OEM, and customer care platforms and offers a robust, common feature-set that's fully functioning.
- **Slim desktop with 4 industry-standard PCI slots:** gives you the flexibility to expand your system and provides more capacity for PCI I/O cards.

Stable, versatile, slimline



HP b2600 Workstation

Specifications

Form factor:	Desktop, tower or rackable
Processor	PA-8600 processor at 500 MHz with 1.5 MB on-chip L1 cache (0.5 instruction, 1 MB data)
Memory	Up to 4 GB of PC120 SDRAM (4 DIMM slots)
Expansion bays	1 external 5.25 inch bay, 2 internal 3.5 inch bays
Drive controllers	Integrated Ultra2 SCSI LVD; optional NSE SCSI HD 68 card (up to 7 devices)
Hard drives	Up to two 146 GB (10K rpm) or 73 GB (15K rpm) Ultra2 SCSI drives, 292 GB max.
Removable media	DVD-ROM or CD-RW (HP-UX 11.0 and higher)
Expansion slots:	4 total: 2 half-length 32-bit 33 MHz PCI; 2 full-length 64-bit 66 MHz PCI-X
Graphics	2D & entry 3D: HP fxe; 2 max. 24 MB unified memory, 9.5 MB maximum texture memory at 1280 x 1024 resolution Mid-range 3D: HP fx ⁵ pro; 1 max. 64 MB unified memory, 48 MB max. texture memory at 1280 x 1024 resolution
Networking interface	Integrated 10/100 LAN
Audio	Optional PCI 16-bit
Operating systems supported	HP-UX 11i TCOE (Technical Computing Operating Environment) HP-UX 11i MTOE (Minimal Technical Operating Environment) HP-UX 11.00 ACE9911 HP-UX 10.20 ACE9912 (supported)
I/O ports and connectors	2 9-pin serial interface DIN ports (rear); 1 parallel interface 25-pin DIN port (rear) - 1 port; 2 USB (Universal Serial Bus) Series A for keyboard and mouse only (rear)
Power	320 watts output
Dimensions (h x w x d)	Tower configuration: 12.71 cm (5.0 in.) x 40.64 cm (16.73 in.) x 45.69 cm (18 in.) Racked configuration: 3-EIA units x 48.3 cm (19 inches) x 49.57 cm (17 inches) Rack orientation horizontal
Weight	Minimum configuration: 18.21 kg (40 lbs)/ fully loaded: 20.26 kg (44.5 lbs)
Monitor	HP L1755 17-inch flat panel, HP L1955 19-inch flat panel, HP L2035 20.1-inch flat panel, HP L2335 23-inch flat panel (not compatible with HP fxe graphics card), HP P1230 22-inch CRT
Warranty	One year parts, labor, and on-site service, 24X7 telephone support in many countries; terms and conditions may vary, certain restrictions apply

Screen image courtesy of EDS PLM Solutions and Fella-Werke GmbH & Co. KG

© Copyright 2001 Hewlett-Packard Development Company, L.P. UNIX is a registered trademark of The Open Group in the United States and other countries. All other product names mentioned herein may be trademarks of their respective companies. The information contained herein is subject to change without notice and is provided "as is" without warranty of any kind. The warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty.

To learn more, visit www.hp.com/go/workstations

5982-1619EN, 03/2005

